





GCC Headquarters 4F-1., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan 886-2-6616-6692 Fax: 886-2-2694-6875 No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China 86-512-5726-1515 Fax: 86-512-5726-1518 GCC Europe B.V. Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands 31-10-458-9367
GCC America, Inc 20550 Carrey Road, Walnut, CA 91789, USA 1-909-718-0248

1-909-718-0248 Fax:1-909-718-0251 US & Canada Only Toll Free: 1-888-284-5211



Innovation With a Human Touch



www.GCCworld.com







Founded in 1989, GCC is a global forefront equipment-manufacturing provider in the visual communication industries. Headquartered in Taiwan; GCC serves an international network of distributors worldwide and has branch offices throughout United States, Europe and China. GCC provides a broad range of hi-tech and quality products including cutting plotters, laser engraving / marking / cutting systems. With over 100 current and pending worldwide product patents and trademarks, GCC has earned a worldwide reputation for innovation, quality and reliability.

Table of Contents



P1 Application

P1~3 Engraver/Cutter/Marker



P4~P6 Laser Engraving Systems

	too. Ing. armig of otomo
P7~P8	Piolas Series / Spirit PRO Series
P9~P10	S400 / E200S Series
P11~P12	Spirit Series / Spirit GLS Hybrid
P13~P14	MercuryIII / C180 II
P15	MG380 Hybrid



P16	Laser	Cutting	Sys	tems

P17~P18	X Series / FMC280-Z1
P19	T500



P20 Laser Marking Systems

P21~P22 | Series / C Series

P23~P24 LFC D / 3DS

LASER SYSTEMS

Engraver \ Cutter \ Marker



Contact Info



GCC Headquarters

4F, No.236, Fu-Te 2nd Rd., Hsi Chih, Taipei Hsien, 221, Taiwar Tel: +886-2-2694-6687 Fax:+886-2-2694-6875 sales@gccworld.com www.GCCworld.com



GCC China

No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China Tel: +86-512-5726-1515 Fax:+86-512-5726-1518 marketing@gcc-china.com

www.GCCworld.com



GCC America Inc.

20550 Carrey Road, Walnut, CA 91789, USA
Tel:+1-909-718-0248 Fax:+1-909-718-0251
sales@gccamerica.com
www.GCCworld.com



GCC Europe B.V.

Eglantierbaan 43-45 , 2908 LV, Capelle aan den IJssel, The Netherlands Tel : +31-(0) 10-458-9367 eusales@gccworld.com www.GCC/world.com **Application Application**

WE CAN DO MORE than you can imagine!

Material		Engraving / Marking		Cutting	
		CO2	YVO4 / Fiber	CO2	YVO4 / Fiber
Clear /	Acrylic	0	X	0	Х
MDF		0	0	0	Х
Paper		0	0	0	0
Rubbe	r	0	0	0	Х
Ceram	iic	Х	Х	Х	Х
Glass		0	Х	0	Х
Tile		0	0	Х	Х
Marble)	0	Х	Х	Х
Leathe	er	0	0	0	Х
Plastic	PET	0	Х	0	Х
Flasiic	ВОРР	0	Х	0	Х
	РСВ	0	0	0	Х
ITO	PET	Х	0	0	Х
	Glass	Х	0	Х	X
	Copper	Х	0	Х	0
	Aluminum	Х	0	Х	0
	Anodized Aluminum	0	0	Х	0
Metal	Stainless Steel	Х	0	Х	0
	Iron	Х	0	Х	0
	Silver	Х	0	Х	0
	Gold	Х	0	Х	0

Laser Engraving Systems










Phone Engraving

Laser Cutting Systems



Acrylic





GCC LaserPro laser engravers can be used for impeccable engraving and fine cutting. Laser processing can be incorporated into all kinds of manufacturing process or fabrication. Combine your creativity with the machine and the possibilities are unlimited.



















GCC LaserPro Laser cutters are suitable for various applications that require laser cutting. With models varying from 80W - 200W, there will be a suitable model for your cutting needs.













3D Model

Magnet









Laser Marking Systems



Ring



Key Pad



Recordable Media



2D Barcode on PCB

GCC LaserPro laser markers are fast and dependable industrial systems that can be setup to fulfill mass production needs. Various different kinds of application or special effects such as permanent marking are achievable with different types of laser.



IC Chip



stainless Steel



2-ply Laminate



Carton Box



Image Marking



Golf Club



1D Barcode



Motor Encoder



Pharmaceutical Packaging



Lighter

GCC LaserPro Laser Engraving / Marking / Cutting Systems

GCC LaserPro laser product line includes engravers, markers, and cutters, which carries exceptional laser output quality, and provides quality engraving, marking and cutting results. With our continuous R&D development, our laser products have been awarded with numerous patents and earned countless awards.

Laser Engraving Systems

GCC LaserPro offers a variety of laser engravers with different wattages and table sizes to suit diverse business needs. Years of R&D experience and quality-assured product has brought GCC global acclaims and popularity among users worldwide.

Spirit PRO Series (CO2 / Fiber / Dual Model)

LaserPro Spirit LS PRO distinguishes itself from the competition by combining unparalleled speed, output quality, reliability, and userfriendliness. With an abundance of useful and innovative features, like SmartEYES ™ CCD. The Spirit LS PRO sets the standard as the industrial benchmark for laser engravers.



CC.

Piolas 400

The latest professional laser engraving and cutting machine, the Piolas 400, is the pinnacle of our technological advancements. It boasts an unprecedented speed of 175ips, innovative SmartEYES and live-view CCD making operation seamless and effortless.



S400

Inherit all the advantages from Spirit Hybrid, a brand new machine – S400 features 140ips processing speed by DC servo motor, innovative touch panel, user friendly interface and a modern good looking design. Together with SmartLID easy access, dust protection, S400 presents you the highest throughput and precise laser quality.

C180II

The desktop C180II is designed to provide an enjoyable engraving experience. Underneath the stylish exterior is a full 18" x 12" (458 x 305 mm) working area. Engraving depth can be easily extended from the normal 4 inches to 6 inches in less than a minute. The C180II is an all purpose laser

engraving system that delivers spectacular engraving and cutting results and makes every job a pleasant working

Laser Engraving Systems

E200S

E200S provides an easy operating workflow and is able to complete different processing procedures quickly. Most importantly, E200S contains various advanced functions like blue laser module as an option, with stable quality, and excellent safety features.




Spirit GLS Hybrid

Spirit GLS Hybrid is an award-winning model of Spirit line for laser machines. In succession to GCC LaserPro's worldwide accolades features, Spirit GLS Hybrid further upscales its capability to CO₂ & Fiber Hybrid laser option in one system. Let this hybrid laser machine upgrade your business for more engraving, cutting, marking applications on organic and metal materials.



The cream of the crop, the Spirit Series with Spirit and Spirit LS models are the professional models from the ingenious GCC LaserPro laser machine line up. Equipped with the most versatile and up-to-date features available in the industry, the Spirit Series is the best choice for advanced use.

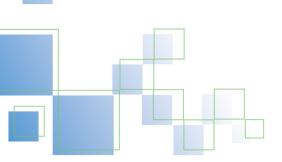



Mercury III

The workhorse models from the GCC LaserPro laser machine line up answers the call for your everyday production needs. With a huge worldwide installation base and proven track record, these models are consistently granting satisfactions for everyday work.

MG380Hybrid is equipped with RF driven and DC excited dual CO2 laser tubes at the same time which allow user to produce superior engraving and cutting work piece. All in one machine save your storage space and make your profit maximum. The GCC LaserPro users always have an edge over the others with numerous uniquely innovative and user friendly features.







Piolas Series



Spirit PRO Series

GCC





Equipped with SmartEYES[™] CCD (Panoramic CCD)

SmartEYE™ CCD on the top-lid, enables to view all the working area. Help you do positioning with ease.



4.45 m/s (175 in/s) Engraving Speed

The world fast stand-alone laser machine



SmartEYES[™]

SmartEYESTM camera allows you to preview your design to make positioning simple and



CO2 & Fiber Hybrid Lasers (Spirit GLS Hybrid PRO Only)

GCC Hybrid technology allows to install CO2 & Fiber dual lasers in one system to expand your business from organic materials processing to direct metal engraving.



Standard Live-view Camera for Educational Use

Includes a standard live-view camera for educational use.



O Transparent Upper Cover Window for a Wide Field of View

Transparent top cover to increase the visible range during processing.



Ocomes with a 7" Touchscreen Display

Easy access design simplifies maintenance and processing.



DuraGuide

Spirit LS PRO

(CO2 / Fiber Model)

The Spirit LS PRO features a robust motion system with reinforced Kevlar belts and precise servomotor control for superb output quality during rapid movement.



Specification

Laser Model

Work Area

SmartLIDTM (Patented)

GCC

Spirit GLS Hybrid PRO

An innovative lid that opens from both ends allowing easier access for daily maintenance.



Spirit LS PRO

CO2 / Fiber

640 x 460 mm (25 x 18 in.)

Extendable to 740 x 460 mm (29 x 18 in.)

Easy to use 4" Touch Panel

The touch panel provides a coherent hot-key design and graphic icons for direct laser parameter adjustments, unlimited job repetition, queuing, deletion, and more



Spirit GLS Hybrid PRO

CO2 / Fiber / Dual

860 x 610 mm (34 x 24 in.)

Extendable to 965 x 610 mm (38 x 24 in.)

Specificat	tion	Piolas Series		
Laser Mode	ı	Piolas 400 Piolas 400SE		
Work Area	without CCD	1016 x 610 mm (40 x 24 in.)		
Work Area	with CCD	1010 x 610 11	IIII (40 X 24 III.)	
Table Size		Standard Alu Grid Cutting Table Standard Alu Grid Cutting Table with Leveling Adjustment w/o Leveling Adjustment		
Wroking Tab	ole Size	1,021 x 614 mm (40.2 x 24.2 in.)		
Laser Sourc	е	60W, 80W, 100W, 120W		
Drive		AC Servo System		
Maximum M	otor Speed	4.44 m/s (175 in/s)		
Z-Axis Move	ement	Automatic		
Safety		Class 2 Laser Produc 2006/42/EC Machine	EN60825-1:2014, EN ISO 13849-1:2023 ct Complies with CDRH vry Directive Compliance H with the optional pass-through door module	

	CO2	30W to 100W 10.6-µi	m sealed CO2 Laser	
Laser Source	Fiber	30W or 60W fiber laser		
	Dual	Not Available	Available	
Drive		Closed-loop D	C servo control	
Maximum	CO2	30W - 40W: 2.54 m/s (100 in/s) /	30W - 40W: 2.54 m/s (100 in/s) / 60W - 100W: 3.04 m/s (120 in/s)	
Engraving Speed*	Fiber	30W or 60W: 3.04 m/s (120 in/s)		
Z-Axis Movement		Automatic		
Safety		Class 1 Laser Product Compliant with EN60825, Class 2 Laser Product Compliant with CDRH, 2006/42/EC Machinery Directive Compliance		
			H with the optional pass-through door module	

S400



E200 Series





Laser Engraver

Perfect Cutting and Engraving **Throughput**

Maximum 3.55 m/s (140 in/s) processing speed with powerful DC servo motor to boost productivity while maintaining precision.



SmartFLOW[™] Technology

 $\mathsf{SmartFLOW}^{\mathsf{TM}}$ invention creates a perfect Air Flow to enhance the vacuum effect and bring out the dust completely while working.



Simple but Professional

Multifunction user interface for both beginners and advance users



Unmatchable Output Quality

E200S takes your engraving and cutting to a level beyond other desktop laser engravers



Higher Working Depth

Depth of Z-axis up to 11" (280 mm)



● SmartSEALTM Technology

New gantry design to prevent dust, the easy take-off cover also makes the maintenance a lot easier.



Pass-through Front to Rear **Doors (Optional)**

A design with doors on both ends of the laser engraver to accommodate extremely long working pieces, front door without the need for a screwdriver.



Standard Water Chiller for Long-time Working

E200S desktop laser engraver comes with a standard water chiller to ensure machine efficiency.



Specification

Laser Model

Laser Source Laser Wattage

Maximum Motor Speed

Z-Axis Movement

Drive

Safety

Work Area Table Size

7" Large Touch Panel

With colorful intuitive 7" touchscreen interface, E200S desktop laser engraver can bring your inspiration to



40W Glass Tube

E200S

Live Camera Preview

E200 Series

E200SL

510 x 330 mm (20 x 12.9 in.)

Standard Grid Cutting Table 540 x 360 mm (21.2 x 14.2 in.) Sealed CO₂ Laser

Closed-loop DC servo control

0.51 m/s (20 in/s)

Manual Class 1 Laser Product Complies with EN60825-1

Class 2 Laser Product Complies with CDRH Class 4 Laser Product Complies with Blue Laser (option)

E200S's on board camera allows you to preview your design to make positioning simple and



E200SM

30W Metal Tube

Specification	n	S400
Work Area		916 x 610 mm (36 x 24 in.) Extendable to 1016 x 610 mm (40 x 24 in.)
Table Size		Standard Grid Cutting Table 1019 x 613 mm (40.1 x 24.1 in.)
Laser Source	CO2	10.6-μm CO2 sealed laser: 60~120W; 9.3-μm CO2 sealed laser: 60W
	Fiber	30 / 50 W
	Dual	60 ~ 120W 10.6-μm sealed CO2 Laser or 60W 9.3-μm sealed CO2 laser 30 / 50 W Fiber laser
Drive		Closed-loop DC servo control
Maximum Motor Speed		3.55 m/s (140 in/s)
Z-Axis Movement		Automatic
Safety		Class 1 Laser Product Complies with EN60825-1:2014, EN ISO 13849-1:2015 Class 2 Laser Product Complies with CDRH 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module

Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail. Specifications are subject to change without prior notice.

^{*} Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail Specifications are subject to change without prior notice.

Features/ Spec

Spirit Series (Spirit, Spirit LS)

Laser Engraver





Spirit

Spirit GLS Hybrid



Spirit GLS Hybrid

SmartPIN[™] AutoFocus (Patented)

The plug-and-play probe design makes focusing a one-touch process and provides the accuracy and precision required for optimum quality in the lasing process.



Pass-through Front / Rear **Doors (Optional)**

SmartFLOW™ invention creates a perfect Air Flow to enhance the vacuum effect and bring out the dust completely while working.





Oc & Fiber Hybrid Lasers

GCC Hybrid technology allows to install CO2 & Fiber dual lasers in one system to expand your business from organic materials processing to direct metal engraving.



Pass-through Front and Rear Doors (Optional)

Optional front and rear door design enables loading of extremely long working pieces.



Ney Switch & Emergency Stop

A key switch prevents unauthorized use, while a prominent emergency button on top stops the laser and motion instantly for safety.



Drag-N-Play

An innovative feature based on servomotor technology simplifies operations and setup time. Just hand drag the lens carriage to the desired position and press start to begin the job.



SmartCENTER™ (Patented)

The SmartCENTER™ function makes it easy for users to automatically locate the center point of objects, significantly reducing setup time.



DuraGuide

A reliable motion system with reinforced Kevlar belts and precise servomotor control ensures superb output quality during rapid movement.



Specification

Laser Model

Work Area

Table Size

Drive

Safety

Laser Source

Maximum Motor Speed

Z-Axis Movement

Real Pointer Alignment Feature

Extra beam combiner to align red pointer with laser beam, What You See is What You Get.



CO₂

10.6-µm CO2 laser

30~100W

Spirit GLS Hybrid

860 x 610mm (34 x 24 in.) Extendable to 965 x 610 mm (38 x 24 in.)

1025 x 705 mm (40.3 x 27.7 in.)

Closed-loop DC Servo Control

2.03 m/s (80 in/s)

Automatic Class 1 Laser Product Compliant with EN60825

Class 2 Laser Product Compliant with CDRH 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module

● SmartACTTM (Patented)

Ground-breaking technology that reduces the ramping process, the job running time, which translates into higher productivity.



Fiber

Fiber laser

20~60W

Specification	Spirit	Spirit LS		
Laser Model	CO2			
Work Area	640 x 460 mm (25 x 18 in.) Extend	640 x 460 mm (25 x 18 in.) Extendable to 740 x 460 mm (29 x18 in.)		
Table Size	790 x 530 mm	(31.1 x 20.9 in.)		
Laser Source	12 to 100W 10.6-µm sealed CO2 Laser / 20W & 60W 9.3-µm sealed CO2 Laser			
Drive	Closed-loop DC servo control			
Maximum Motor Speed	1.52 m/s (60 in/s) 2.03 m/s (80 in/s)			
Z-Axis Movement	Automatic			
Safety	Class 1 Laser Product Compliant with EN60825 Class 2 Laser Product Compliant with CDRH 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module			

Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail. Specifications are subject to change without prior notice.

^{*} Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail Specifications are subject to change without prior notice.

Mercury III

Laser Engraver



MercuryIII

C180II



C180II

Pass-through Front / Rear Doors (Optional)

A design with doors on both ends to accommodate extremely long working pieces without the need for a screwdriver.



DC Servo Motor

A Closed-loop DC servo motor offers higher continuous shaft power and speed compared to a stepper of the same size. Its continuous movement provides greater accuracy, eliminating the need for constant stopping and starting.





Closed-loop DC Servo Motor and Reliable Motion System

The C180II utilizes high performance Closed-loop DC servo motors for precise and fast carriage movement combined with a reliable motion system to produce exceptionally accurate outputs.



SmartPRINT™ (Optional)

The GCC LaserPro SmartPRINT™ software features powerful functions, an intuitive interface and embedded GCC LaserPro laser parameter setting for both MAC and Windows users



AutoFocus (Patented)

Patented AutoFocus Gauge ensures precise focal point adjustment for laser engraving. It eliminates human error and provides accurate distance measurement from the material surface.



Drag-N-Play

An innovative feature based on servomotor technology simplifies operations and setup time. Just hand drag the lens carriage to the desired position and press start to begin the



Easy to Use Control Panel

A control panel with coherent hot-key design and graphical icon displays that allows you to change laser parameter settings, set jobs to repeat unlimited times, queue jobs, delete jobs, and more.



Dust Protection Design (Patented)

Dust protection covers around working table to provide marvelous exhaust vacuum together with Smart Vacuum design, and prevention dust accumulated on laser



Specification

Maximum Motor Speed Z-Axis Movement

Laser Model

Work Area


Table Size Laser Source

Drive

Safety

● Built-in SmartBOXTM (Patented)

The built-in SmartBOXTM feature produces a downward pulling force to keep light items in place creating a stable working environment.



Simple and Intuitive Control Panel

A user-friendly menu-driven interface system simplifies operation. Hot keys design and job status display facilitates your work and makes it clear and easy to carry out.

C18011

CO2 18 x 12 in. (458 x 305 mm)

20.4 x 14.7 in. (520 x 375 mm)

Closed-loop DC Servo Control 1.01 m/s (40 in/s)

Automatic Class 1 Laser Product Compliant with EN60825.

Class 2 Laser Product Compliant with CDRH 2006/42/EC Machinery Directive Compliance

12 to 40 Watt Sealed CO2 Laser



Specification	Mercury III		
Laser Model	CO2		
Work Area	635 x 458 mm (25 x 18 in.)		
Table Size	790 x 530 mm (31.1 x 20.9 in.)		
Laser Source	12, 30, 40, 60W Sealed CO2 Laser		
Drive	Closed-loop DC Servo Control		
Maximum Motor Speed	1.07 m/s (42 in/s)		
Z-Axis Movement	Automatic		
Safety	Class 1 Laser Product Compliant with EN60825 Class 2 Laser Product Compliant with CDRH 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module		

Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail. Specifications are subject to change without prior notice.

^{*} Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail Specifications are subject to change without prior notice.

MG380Hybrid

MOON CHANG

Laser Engraver

GCC



Superb Engraving and **Cutting Quality**

Embrace total solution in one machine. Innovative GCC LaserPro MG380Hybrid deliver superior engraving and cutting result by its high end technology.



Pass-through Front / Rear Doors (Optional)

This convenient front and rear door design enables operators to load extremely long working pieces.





Big red button located on the top of the machine allows operators to stop the laser and the motion carriage immediately to provide a highly safe operational enviroment.



Programmable Origin

Easy-to-use position modes in Drag-N-Engrave simplify job setup by allowing operators to effortlessly relocate the origin position, streamlining repetitive workflows.



SmartBOX[™] (Optional)

This innovative design is composed of a ventilation box, a honeycomb table and easily rearrangeable magnetic supporting pieces. The SmartBOX™ provides great cutting quality and remarkably enhances air



Specification	MG380Hybrid		
Laser Model	MG380Hybrid-12100 MG380Hybrid-30100		
Work Area	960 x 610 mm (38 x 24 in.)		
Table Size	1085 x 750 mm (42.7 x 29.5 in.)		
Laser Source	Sealed CO2 Laser		
Drive	Closed-loop DC Servo Control		
Maximum Motor Speed	1.01 m/s (40 in/s)		
Z-Axis Movement	Automatic		
Safety	Class 1 Laser Product Compliant with EN60825 Class 2 Laser Product Compliant with CDRH 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door modul		

Laser Cutting Systems

GCC LaserPro laser cutters offer an ideal cutting and engraving solution for industrial users. Laser cutters are equipped with sealed Fliber / CO₂ laser tubes with reliable quality, providing high power wattage for quality cutting capability and high throughput.

X-Series

(X252RX, X380RX, X500III Pro)

The GCC LaserPro X-series is the best economical choice for laser cutting. 3 models are available from the X-series: X252RX, X380RX, and the X500III Pro.



FMC 280-Z1

Compact size high power fiber laser engraving and cutting system, GCC LaserPro delivers an easy way to operate fiber laser cutting system which yields spectacular cutting edges. The FMC 280-Z1 is a cutting specialist engineered for performance and produces excellent output quality. Innovative features developed from GCC LaserPro's years of experience makes the FMC 280-Z1 the most user-friendly system on the market.



T500

Developed on the basis of GCC LaserPro's accumulated technology with new powerful motion system. GCC LaserPro T500 is capable of exceptional 3D engraving quality and cutting at high speed which make it a high ROI laser system on the market. Equipped powerful 200W laser tube allow user to deliver clear and fine cutting result. GCC LaserPro T500 is a dedicated design to fulfill your cutting and engraving needs in one machine with high throughput and superb quality.



Features/ Spec

Laser Cutter

X-series (X252RX,X380RX,X500III Pro)

Laser Cutter







FMC 280-Z1



Features/ Spec



Outstanding Cutting Capability

X Series delivers high cutting quality with GCC LaserPro's unique laser firing control technology.



Pass-through Front / Rear Doors (Optional)

A design with doors on both ends to accommodate extremely long working pieces.

*Pass-through Material Thickness: X252RX & X380RX:6.5 inch. X500III Pro:1inch.






Unique Fiber Laser Source with **Exquisite Cutting Capability**

Leading fiber laser with unique firing mode control meets varied metal sheet processing needs, cutting up to 3mm thick stainless steel and highly reflective metals like aluminum and copper with clear edges.



Capacitive Cutting **Head with Autofocus**

Precise capacitive cutting head design is able to keep fixed distance between cutting head and heat deformed material to obtain consistent cutting quality over the platform.



Unique Motion Guide

A unique motion guide is designed specially for X500III Pro by adopting a light weight and high strength structure, together with DC servo motor to provide first class stability and accuracy. (For X500III Pro)



Specification

Laser Model

Laser Source

Maximum Motor Speed

Z-Axis Movement

Drive

Safety

* Speed is

Work Area Laser Cooling

Stop

The key switch prevents unauthorized use, while the prominent emergency button on top instantly stops the laser and motion carriage for safety.



X-series X380RX

960 x 610 mm (38 x 24 in.)

Water-cooled

Sealed CO₂ Laser

Closed-loop DC Servo Control

1.01 m/s (40 in/s)

Automatic Class 1 Laser Product Compliant with EN60825 Class 2 Laser Product Compliant with CDRH

2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module

80W / 100W

AAS Contour Cutting Device (patented) (Optional)

Developed by LaserPro, AAS is an exceptionally user-friendly operation which offers accurate and faultless contour cutting by automatically tracking the position of graphics. *N/A for x500III Pro.



100W

X500III Pro

1300 x 916 mm (51 x 36 in.)

Water-cooled

150W

130W

Sealed CO₂ Laser

Drag-N-Play

The "Drag-N-Play" feature greatly reduces the complex set up procedures and allows the users to directly drag the lens carriage to the starting point of a job.



Vivid Image Engraving

A user-friendly menu-driven interface system simplifies complex tasks. Hot keys design and job status display facilitates your work and makes it clear and easy to carry out.

to collect completed workpieces and clean scrap easily.



Collecting Drawer

It is a convenient design for users

000

Specification		FMC 280
Laser Model		FMC 280-Z1
Work Area	Normal	712 x 370 mm (28 x 14.5in.)
	With Thin Film Clamp	458 x 305 mm (18 x 12 in.)
Laser Source		1070nm fiber laser source, 1.5kW peak power
Max. Part Size (L x W x H)		786 x 542 x 120 mm (30.9 x 21.3 x 4.7 in.)
Drive		Closed-loop DC Servo Control
Maximum Motor Speed		0.51 m/s (20 in/s)
Z-Axis Movement		Automatic
Safety		Class 1 Laser Product Compliant with EN60825 Class 2 Laser Product Compliant with CDRH
		2006/42/EC Machinery Directive Compliance

not equal to throughput. See dealer or visit www.gccworld.com for more detail.	
tions are subject to change without prior notice.	

X252RX

635 x 458 mm (25 in. x18 in.)

Water-cooled

80W / 100W

Sealed CO₂ Laser

^{*} Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail. Specifications are subject to change without prior notice

Features/ Spec Laser Cutter Products

T500



□-T500




AC Servo Motor and Unique Motion

High toque and high speed AC servo motor assures long motor lifetime and high precision. A light weight and high strength structure together with AC servo motor and steel cord belt to provide first class stability and accuracy.



Excellent Speedy Scribing Quality

T-500 embrace extraordinary control system and rigid motion system allow user to create top-notch vector scribing quality with high speed.



Nnife-shaped Cutting Table

Unique cutting table with tipped bars that can be easily adjusted without tools to create different levels of working depths. The cutting table of T500 reduces laser reflections and delivers clear cutting edge



Outstanding Cutting Capability

T500, with LaserPro's advanced laser firing control, delivers high-quality cutting. With up to 200W power, it easily cuts 1" (25mm) acrylic in one pass, leaving a smooth finish



Extension Table (Optional)

Extension roller tables help loading and unloading large piece work piece with ease, furthermore, it extends T500 maximum parts size to 1300 x 1500 mm (51" x 59").



Specification			T500		
Laser Model	60W	80W	100W	150W	200W
Work Area	1300 x 905 mm (51 x 35 in.)				
Table Size	1346 x 916 x 127 mm (53 x 36 x 5 in.) with 2"/4" lens(w/o Cutting Table)				
Cooling	Air-cooled			Water-cooled	
Focus Lens	Standard 4" focal lens in enclosed lens carriage (Optional 2"/6" lens)			Standard 6" focal lens in enclosed lens carriage (Optional 2"/4" lens)	
Drive	AC servo Control				
Maximum Motor Speed	1.01 m/s (40 in/s)				
Z-Axis Movement	Manual				
Safety	Class 1 Laser Product Compliant with EN60825 Class 2 Laser Product Compliant with CDRH 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module				

Laser Marking Systems

GCC LaserPro laser marker series carries selection of CO₂ and fiber, laser sources, providing users in any industry with outstanding quality equipments. The galvo scan-head brings you fast marking speed and is able to perform the finest marking detail.




StellarMark I Series & C Series

The GCC StellarMark C-series and I-series are high speed galvanometer laser marking systems. The C-series are marking systems with CO₂ laser while I-Series are marking systems with fiber lasers suitable for working with metallic materials.



LFC D Desktop Workstation

GCC LaserPro LFC D is a desktop workstation for laser markers. The industry-level equipment has many advanced features such as an anti-trapping door, key switch, user-level control, pass-through, etc. and meets customers' needs completely.

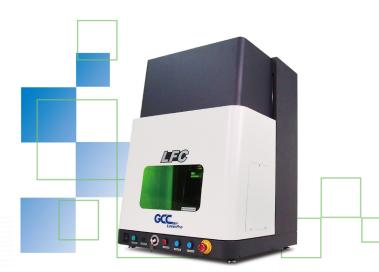

3DS

StellarMark 3DS Laser Marker series is integrated with a 3D scan head, which allows users to process round/cylinder objects with ease. The scan head provided with a 300x300mm working area and the focus range is 100mm.



* Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail.

Specifications are subject to change without prior notice.

StellarMark I Series



StellarMark C Series





● G-Mark Library (Optional)

This programmable software can be used to customize functions by using VB scripts. All commands are received real time from a master PC and position offsets. rotating angles, and sequential marking can be easily set up.



Automatic Serial Marking

With this feature, users can increase or decrease the serial part number automatically.

LaserPro	LaserPro	LaserPro
00001	00010	10000
LaserPro	LaserPro	LaserPro
00002	00020	20000
LaserPro	LaserPro	LaserPro
00003	00030	30000

RoHS Compliance

As a market leader and eco-conscious manufacturer, GCC is committed to preserving the global environment. Our products comply with EU Directive 2002/95/EC (RoHS).



Wobble Marking

This function allows the true type text to be marked with thicker line.



Barcode Marking

19 types of 1D and 8 types of 2D barcodes (Data Matrix, PDF417, QR Code and Maxi Code) are available.




Mark on The Fly (Optional)

Non-stop, "on-the-fly" marking of parts maximizes productivity. Precise laser can mark fast-moving parts while the conveyor is at constant or varying speed.




Pyramid Focus Tool

The innovative and patented pyramid focus tool is an accessory unit for providing the best working distance on StellarMark IFII series.




Preview Mode

Variable-speed, red dot pointer "preview" mode performs accurate and easy marking positioning on the marked part.



Array Copy

Users can create multiple copies of a text or graphic by specify the number of copies to be replicated and the graphic will be rendered in



Font Marking Variations

This feature enables marking of a variety of character expressions via Arc Alignment, Angle Alignment, and Marking Direction.



Specific	ation	StellarMark I-series				
Laser Model IFIIS 20JFL IFIIS 30JFL IFIIS 50JFL IFIIS 60			IFIIS 60JFL			
	Wavelength	1064 nm				
	Туре	Yb-doped, MOPA				
Laser	Output Power	20W 30W 50W 60W				
Source Beam Mode TEN				M00		
	Beam Quality (M²)	<1.5	<1.5	<1.5	<1.8	
	Frequency	1-600 kHz	1-600 kHz	1-600 kHz	1-400 kHz	
	Waveform	Single				
	Cooling	Air-cooled Air-cooled				
Max. Linear Marking Speed		3,000 mm/s				
Max. Marking Speed		10,000 mm/s				
Safety	Safety Class 4 (EN60825-1 Class 1 available with safety shield and LFC)			and LFC)		

Specific	ation	StellarMark C-series			
Laser Mod	del	CIIS 12 CIIS 30V			
	Wavelength	10	10.6 μm		
	Туре	CO2, sealed-off			
Laser	Output Power	12W	30W		
Source	Cooling Air-cooled, no water chiller required				
Max. Linea	Linear Marking Speed 3,000 mm/s				
Max. Marki	ng Speed	10,000 mm/s			
Safety		2006/42/EC M 2014/35/EU Lo	ailable with safety shield and LFC) achinery Directive) w Voltage Directive netic Compatibility Directive		

^{*} Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail. Specifications are subject to change without prior notice.


Features/ Spec

LFC D







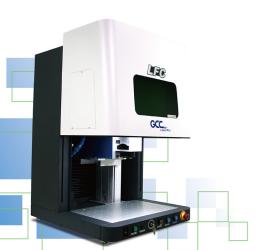

Laser Marker

Pass-through Side Panel

Removable side doors allow user to process long work pieces with ease for greater business flexibility.



300x300 mm Standard **Table**

Standard table with matrix M6 circular slots for fixture mounting; work piece setup could not be easier than this.





D Scan Head

A 3-axis scan head is included for the best marking solution for round/cylinder objects.



300x300 mm Working Area

Standard 300x300 mm working area that helps you process large objects and allow your for far more applications.



● Internal Illumination

LED illuminates the working space for clear view of work in process.



Automatic and Anti-**Trapping Safety Door**

Automatically controlled front door opens and closes to secure safe operation.



● MultiFOCUS Function (Optional Item)

MultiFOCUS function automates multiple focal distances based on object height, adjusting the Z-axis accordingly, reducing the need for frequent focal distance adjustments.



All-in-one Design

Specification

The machine has an advanced All-IN-ONE design featuring size and easy integration into the production line.

*All-IN-ONE design is available only for 20W and 30W.



Key Switch

Users can create multiple copies of a text or graphic by specify the number of copies to be replicated and the graphic will be rendered in a matrix format.



Font Marking Variations

The safety feature enables the manager/owner to keep the machine locked in a specific mode to avoid tampering.



Specification	LFC D		
Laser Model	LFC D		
Available Laser Marker	CIIA 12/30, CIIP12/30, CIIS 12/30		
	IFII 20/30/50RMZ, IFII 20SHS, IFII 20/30/50JFL		
	IFIIS 20/30/50JFL, IFIIS 30/60JML		
	3DS		
Scan Field	Max. 300 x 300 mm		
Working Table Size	550 x 360 mm		
Front Door Automatic door			
Max. Loading (Z-axis Table)	25 kg		
Safety	Class 1 laser product compliant with EN-60825-1 Class 2 laser product compliant with CDRH		

Specific	ativii	งบร			
Laser Model		3DS200-30JML	3DS200-60JML	3DS300-30JML	3DS300-60JML
	Wavelength	1064 nm Fiber Laser			
Laser	Туре				
Source	Output Power	30W	60W	30W	60W
	Cooling	Air-cooled, no water chiller required			
Working Area		200 x 200 mm		300 x 300 mm	
Spot Size	Spot Size 0.041 mm 0.067 mm			7 mm	
Focal Dista	ance	285 mm			
Max. Mark	ing Speed	6,000 mm/s			
Safety		Class 4 (EN60825-1 Class 1 available with safety shield LFC D) 2006/42/EC Machinery Directive) 2014/35/EU Low Voltage Directive 2014/30/EU Electromagnetic Compatibility Directive			

^{*} Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail. Specifications are subject to change without prior notice.