265020060G(02) **Optional Items**



Pass-through

Door Switch



SmartVISION™

Pro CCD



Multiple Table

Choices



Air Compressor

Unit







Fume Extraction Rotary Attachment / System

External Signal

SmartGUARD™ Fire Alarm (Patented)

dule		Rotary Chuck			
Specification		S400			
		С	O ₂	Fiber	Dual
Work Area		1016 x 610 mm (40 x 24 in.)			
Max. Part Size All doors closed		1053 x 647 x 280 mm (41.4 x 25.4 x 11 in.)			
(L x W x H)	All door open	1053 x ∞ x 280 mm (41.4 x ∞ x 11 in.)			
Dimensions (W x D x H)		1440 x 900 x 1048 mm (56.7 x 35.5 x 41.3 in.)			
Weight	CO ₂ 30W~40W	260 kg / 573 lb			
	CO ₂ 60~100W	270 kg / 595 lb			
	Fiber 20W~60W	260 kg / 573 lb			
Laser Source		10.6-µm CO₂ laser	9.3-µm CO₂ laser	Fiber laser	10.6-µm CO₂ laser: 40 to 120W 9.3-µm CO₂ laser: 60W
		40~120W	60W	20 / 30 / 60W	Fiber laser: 20 / 30 / 60W
Cooling		Air-cooled, Operating environment temperature 15°- 30°C (59°- 86°F)			
Drive		Closed-loop DC servo control			
Maximum Motor Speed		140 IPS			
Speed Control		Adjustable from 0.1~100% (Up to 16 color-linked speed settings per job)			
Power Control		Adjustable from 0~100% (Up to 16 color-linked power settings per job)			
Engraving Capability		256-level gray scale image processing capability			
Distance Accuracy		0.254 mm or 0.1% of move, whichever is greater			
Z-Axis Movement		Automatic			
Focus Lens		CO₂: Standard 2.0" (Optional 1.5", 2.5" & 4.0") Fiber: Standard 2.0" (Optional 4.0") Dual (CO₂+Fiber): Standard 2.0" (Optional 3.0" &4.0")			
Resolution (DPI)		Available 125, 250, 300, 380, 500, 600, 760, 1000, 1500			
Interface		10 Base-T Ethernet USB Type-A 2.0 ——— – For USB storage (Max. 32GB capacity, FAT file system) USB Type-B 2.0 — For connecting with the computer			
Compatible Operating System		MS Windows 64 Bit			
Control Panel		Touch Screen			
Safety		Class I Laser Product Complies with EN60825-1:2014, EN ISO 13849-1:2015 Class II Laser Product Complies with CDRH for CO₂ Laser Class 3R Laser Product Compliant with CDRH for Fiber & Dual Laser sources 2006/42/EC Machinery Directive Compliance Class 4 Laser Product Compliant with CDRH with the optional pass-through door module			
Operating Voltage		Below 80Watt, 100-240VAC, 50/60HZ Auto Switching, max. 15A 80Watt and above, 200-240VAC, 50/60HZ Auto Switching, max. 15A			
Fume Extraction System		External exhaust system with minimum flow rate 800m3/h (CFM 471 ft3/min) is required, 2.3kPA negative pressure (Pure-Air PA-1500FS @ 4" exhaust port)			

^{**} Speed is not equal to throughput. See dealer or visit www.gccworld.com for more detail.


^{***} Please use certified brands by GCC for LaserPro USB storage, kindly refer to GCC User Manuals for more details.









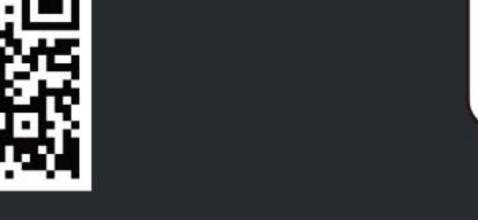





GCC China

GCC Headquarters 4F.-1, No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan 886-2-6616-6692 Fax: 886-2-2694-6875 No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China 86-512-5726-1515 Fax: 86-512-5726-1518 GCC Europe B.V. Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands 31-10-458-9367 GCC America, Inc 20453 E Valley Blvd. Walnut, CA 91789, USA

Authorized Dealer

1-909-718-0248 Fax: 1-909-718-0251 US & Canada Only Toll Free: 1-888-284-5211



The Flagship Model of The Laser Engraver

Your Best Ever, Beyond Expectation, Unlimited Laser Machine.



Laser Engraver

- 1016 x 610 x 30 mm (40 x 24 x 11 in.) extra large working area
- 140ips high speed with DC servo motor for precise and rapid movement of the laser carriage
- GCC SmartFLOW[™] technology provides outstanding dust protection
- GCC SmartLID[™] invention makes maintenance a lot easier
- QSM (Quality Speed Mode) maintains 100% engraving quality while operating at maximum speed
- Patented SmartACT[™] motion control technology increases your productivity by reducing ramping process and job running time
- Drag and engrave feature assures remarkably easy and fast set-ups
- Pass-through front and rear doors to accommodate long working pieces (optional)
- CO₂ and Fiber laser option in one laser machine

Specifications are subject to change without prior notice.





Laser Engraver GCC LaserPro S400

Inherit all the advantages from Spirit Hybrid, a brand new machine – S400 features 140ips processing speed by DC servo motor, innovative touch panel, user friendly interface and a modern good looking design. Together with SmartFLOWTM dust prevention technology and SmartLIDTM easy access invention, S400 presents you the highest throughput and precise laser quality. GCC S400 makes all your imaginations to life at the speed of light.



SmartFLOW[™] Technology

SmartFLOW[™] invention creates a perfect Air Flow to enhance the vacuum effect and bring out the dust completely while working.



SmartACT[™] (Patented)

Ground-breaking
technology that reduces
the ramping process and
the job running time, which
translates into higher
productivity.



SmartLID[™] Easy Access

Easy access design simplifies maintenance.




Pass-through Front & Rear Doors (Optional)

Convenient front and rear door open design enables loading of extremely long working pieces with ease and extends business flexibility.



Intuitive Touch Screen


Operation is easy and intuitive with the 4" touchscreen.

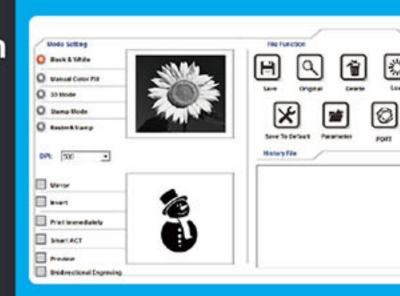

User Friendly Driver Interface

Starting from end users' view, GCC driver evolves into a brand new design with the intuitive interface to favor each user.

Features

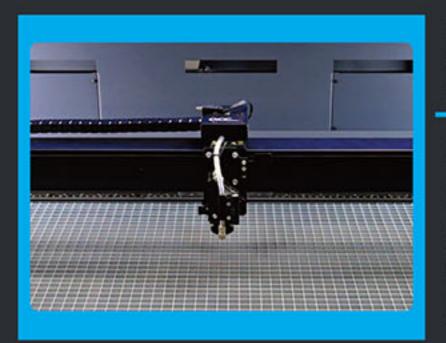


Perfect Cutting and Engraving Throughput

Maximum 140ips processing speed with powerful DC servo motor to boost productivity while maintaining precision.




SmartSEAL[™] Technology

New gantry design to prevent dust, the easy take-off cover also makes the maintenance a lot easier.

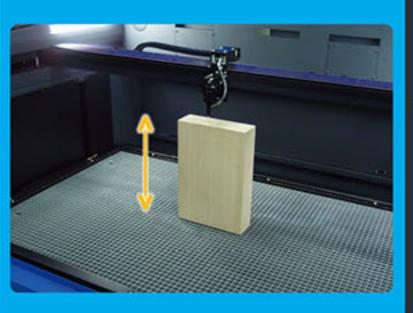

Higher Working Depth

Depth of Z-axis up to 11" (280 mm) thick.

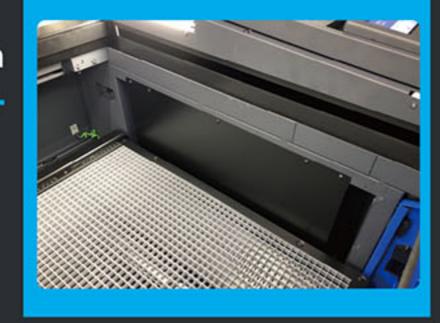

Dust Prevention

Incorporating metal panels to protect key components, but not seal entirely to case any difficulty of maintenance.

GCC LaserPro S400 Application



Paper







