



**StellarMark I-Series Specifications**


StellarMark I-series		IFIIS 30JML	IFIIS 60JML
Laser Source	Wavelength	1064 nm	
	Type	Yb-doped, MOPA	
	Output Power	30W	60W
	Beam Mode	TEM00	
	Beam Quality (M <sup>2</sup> )	<1.4	<1.5
	Frequency	1-4,000 kHz	
	Pulse Width	Multiple	
Max. Marking Speed	Cooling	Air-cooled	
		6,000 mm/s	
Electrical Requirements	Power Supply	100~240V, 50/60 Hz Max 15 Amp	
	Power Consumption	Max. 1650W	
Dimensions	Laser Head	L 497 x W 168 x H 152 mm	
	Control Unit	L 470 x W 360 x H 241 mm	
Laser Marker Weight		9 kg	
Control Unit Weight		25 kg	
Operating System		Microsoft Windows 10/11 (64 Bit) (Desktop or Laptop PCs)	
Environment	Temperature	15°C ~ 35°C	
	Humidity	10 ~ 80% Non condensing	
Safety		Class 4 (EN60825-1 Class 1 available with safety shield and LFC D) 2006/42/EC Machinery Directive 2014/35/EU Low Voltage Directive 2014/30/EU Electromagnetic Compatibility Directive	

**Scan Lens Specifications**


StellarMark IFIIS 30/60JML Scan Lens				
Model No.	70	110	180	300
Working Area	70x70 mm	110x110 mm	180x180 mm	300x300 mm
Spot Size	27 µm	44 µm	71 µm	114 µm
Working Distance	142 ± 1 mm	220 ± 2 mm	350 ± 2 mm	553 ± 3 mm
Repeatability**	0.03 mm	0.03 mm	0.04 mm	0.06 mm

Above specifications are subject to change without further notices. See dealer or visit <http://www.GCCworld.com> for more details.  
 All above spot size will be material dependent.  
 \*According to theoretical calculation  
 \*\*The test is 8-hour continuous firing with power level at 30% using a 60JFL  
 Δ Specifications are subject to change without prior notice

**Optional Items**

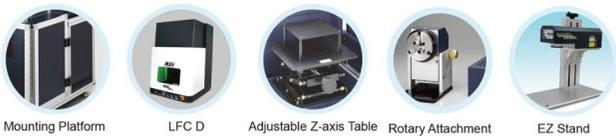

Authorized Dealer

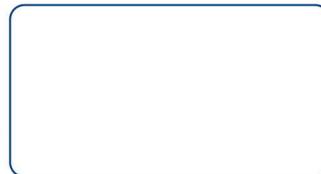


[www.GCCworld.com](http://www.GCCworld.com)



GCC Headquarters 4F-1., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan 886-2-6616-6692 Fax : 886-2-2694-6875  
 GCC China No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China 86-512-5726-1515 Fax : 86-512-5726-1518  
 GCC Europe B.V. Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands 31-10-458-9367  
 GCC America, Inc 20550 Carrey Road, Walnut, CA 91789, USA 1-909-718-0248 Fax : 1-909-718-0251  
 US & Canada Only Toll Free: 1-888-284-5211



**StellarMark i series**

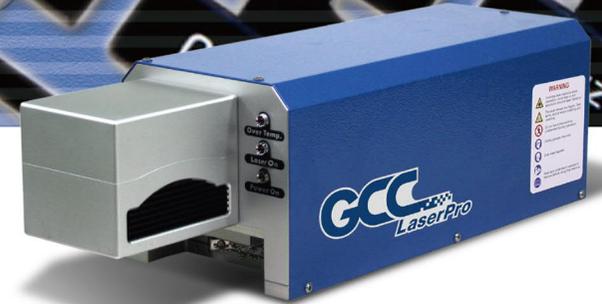

- ▶ Achieve 0.1mm character height with perfect TEM00 beam mode
- ▶ Multiple waveform are available for sophisticated marking and micro-machining applications
- ▶ G-Mark Library (optional) software features customized programming, mark on fly and tiling marking
- ▶ Ideal solution for ABS, PC, PET, wafer, rubber and metal marking

## Application



Depth Marking




Color Marking




Glass Marking



Keypad Marking



Wafer Marking



IC Marking

## StellarMark I-Series

StellarMark I series provides industrial users superior and reliable output quality under long-term operation. From automotive parts and tools to electronic switch and wafer, StellarMark I series provides comprehensive solution for diverse requirements.

## Superior Output Performance


Benefiting from the state-of-the-art design, StellarMark I-Series stands out from the competition by increasing productivity and providing superior output quality. The TEM00 beam mode brings in high precision marking results and stable laser output maintain consistent marking quality. Different M2 values are available with the different models under the IF-series catering to the different requirements for different applications.



IFIIS 30JML / 60JML

### Key Switch

This safety feature enables operators to keep the laser locked to avoid unauthorized use.




### Emergency Stop

The machine can be entirely shut down by pressing the "Emergency Stop" button from controller when any emergency occurs.




### Consistent Power Stability

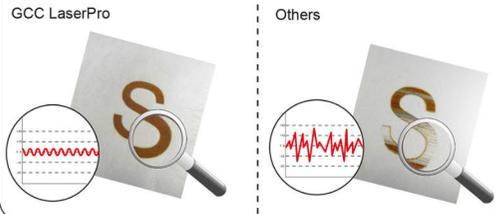

### Superior Text Function

- Automatic Serial Marking
- Barcode Marking
- Wobble Marking
- Jump Cross Marking
- Font Variation
- Logo and Image Marking
- Arc Marking



▲ Jump Cross Marking




▲ Wobble Marking



▲ Arc Marking




▲ Barcode Marking



▲ Automatic Serial Marking


### 2-Point Focus Tool

Two red beams assist the user in accurately setting the focus distance.




### Preview Mode

Variable speed, red dot pointer "preview" mode allows for accurate and easy marking positioning on the marked part.




▲ Full Path



▲ Outline

### Mark On Fly (Optional)

An optional software function that features marking of moving objects on a conveyor.



### G-Mark Library (Optional)

This programmable software can be used to customize functions by using VB scripts. All commands are received real time from a master PC and position offsets, rotating angle, and sequential marking can be set up. With G-Mark Library, the workflow of marking process can be optimized and simplified at the production line.

