



Innovation  
*With a Human Touch*

4F-1, 236, Fu-Te 2<sup>nd</sup> Rd., His Chih,

Taipei Hsien, 221, Taiwan

TEL:886-2-6616-6692 · 2694-6687

FAX:886-2-2694-6875 · 2694-5097


# Mainboard Changing Process C180 II

Version: 1.0  
May 20, 2014

Revision History :

Version	Date	Page	CONTENTS
1.0	May, 20 2014		First release

1. Dismount two screws on the bottom of side panel (see red arrows below)

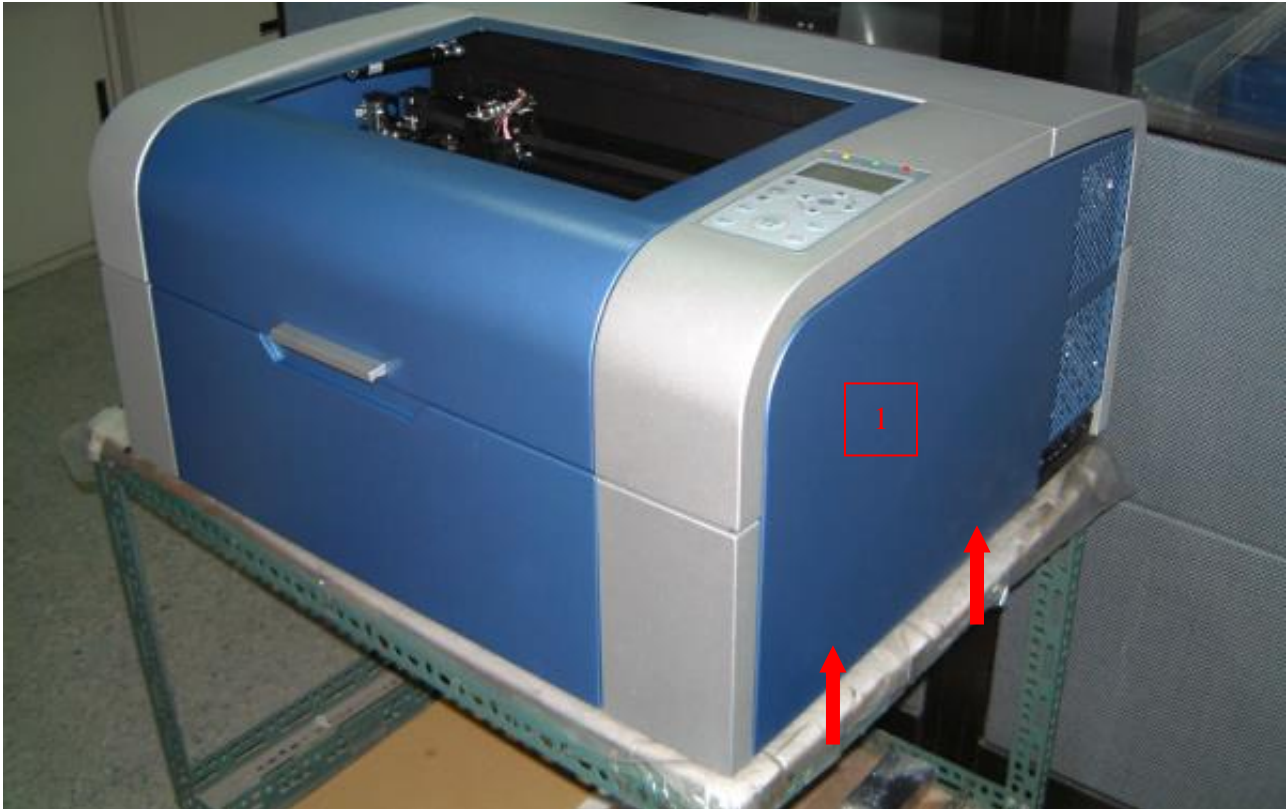

2. Dismount 7 screws (see red arrows below) and remove all cables connecting to main board and can change new main board.

